


# FS2000

DIGITAL INDICATOR WITH GRAPHIC DISPLAY / TOUCH PANEL  
(SD CARD SLOT & HIGH SAMPLING RATE)

CC-Link PROFIBUS  
DeviceNet  
EtherNet/IP  
CE ROHS2

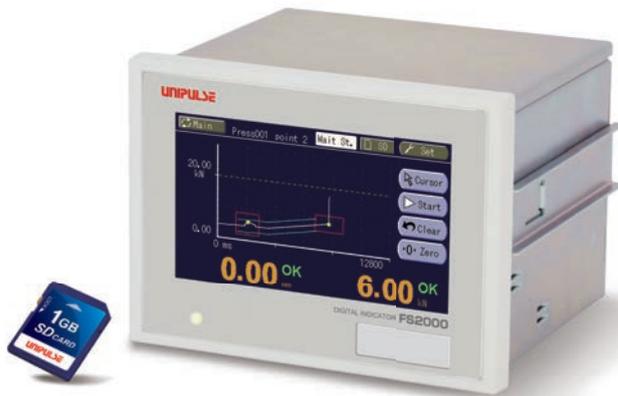

**Performance upgraded!**

**Hysteresis Option & Multi-Point Hold Option Added**

**The best solution for OK/NOK judgment of press fitting and caulking application !!**  
**High responsiveness of 5 kHz to fully utilize the performance of Super Cell !!**  
**A fluctuation of force is shown as a waveform!!**

- Two-dimensional OK/NOK judgement can be performed with a load cell and displacement sensor.
- Analog monitor output  
Voltage output is proportionate to the input signal making the recording on recorder convenient.  
Approx. 2 V per 1 mV/V strain gauge input
- 25000 times/sec. high-speed processing
- Variety of interfaces  
USB / DeviceNet / CC-Link / EtherNet/IP / Ethernet / PROFINET IO
- 4.3-inch color LCD module & touch panel  
Operation can be effortlessly performed by a direct touch on the touch panel.


### Comparison & hold function by waveform display

#### ■ Waveform comparison

This function compares the actual measurement waveform against the setup High/Low limit waveforms and will give out an NOK judgment when any of the point exceeded the preset High/Low limit waveforms.


#### ■ Multi-point judgment

OK/NOK judgment can be performed on multi points in one process. (e.g. The start point and end point of press fitting can be judged respectively.) (Max. 5 points)

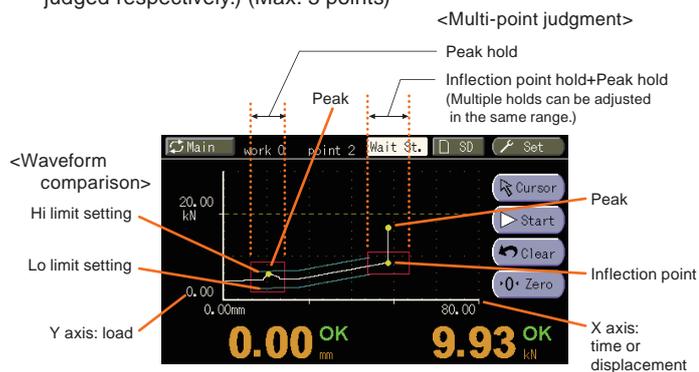

### Improved usability

4.3 inch wide display provides excellent visibility.  
Main display configuration can be selected to keep it as simple as possible by eliminating unnecessary information.

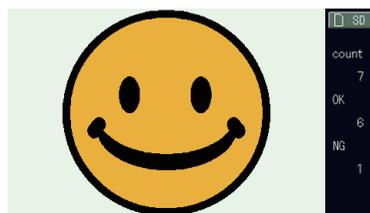


OK judgment




Enlarged numerical display

### Selectable waveform reference


Judgment is possible based on press point of press machine

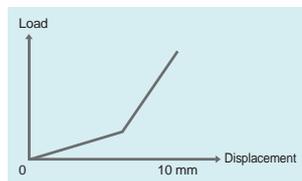

Front reference  
Measurement point starts from left

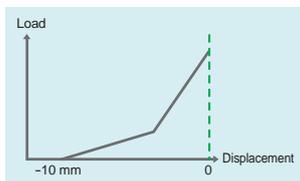


Back reference  
Measurement point starts from right

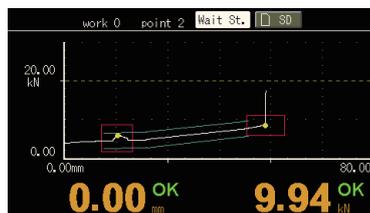

Enlarged waveform display

### Trend display is helpful for preventive maintenance

Trend of the zero-point shift and hold values can be monitored to find any irregularities for preventing breakdown of machines.

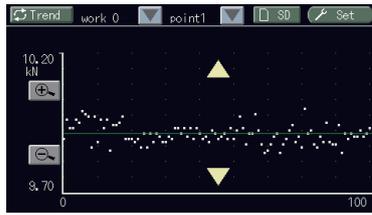

Trend display

### Changed setting items are highlighted!


Master and current set values are listed up for checking the changed setting items easily. Set values can be edited directly on the list without going into each setting menu.

\* Except for waveform comparison settings

Loadcell	Master Setting	Present
Sensing	Use (6-wire)	Use (6-wire)
Excitation Volt.	10V	10V
Unit	N	kN
Zero Calibration	0.000mV/V	0.000mV/V
Equiv. Imp. Cal.	1.000mV/V	0.250mV/V

List display

### Example of use

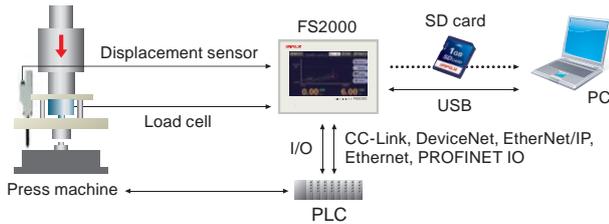

### Saved measured data (waveform) on SD card can be displayed afterwards

Measured data and set values can be saved in the SD card. Data can be converted to CSV format easily for editing with Microsoft Excel.




### FS2000-HYS Hysteresis specifications

#### Standard

Can see going waveform

- Can choose comparison method!

<Differential waveform comparison>  
Judgment of OK/NOK by the difference between going and returning

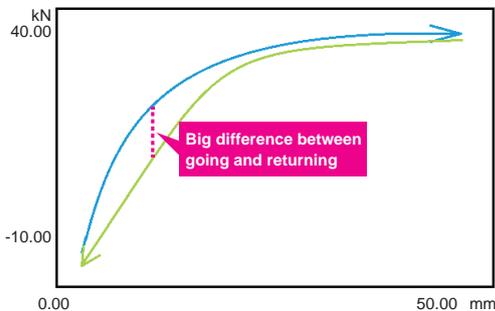


Recommended for below usage:

- Expansion and contraction of the spring
- Rotating the steering wheel clockwise, counterclockwise, etc.

#### Hysteresis specifications

Can see outgoing and return waveform


<Standard waveform comparison>  
OK/NOK judgment for going and returning waveform.

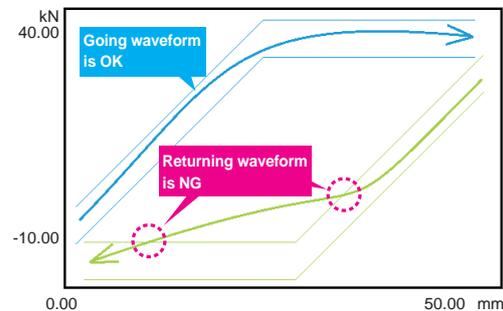

Recommended for below usage:

- Torque hinges used to open and close doors
- Shock absorbers that absorb the impact of tires, etc.

### FS2000-MHP Multi hold point specifications

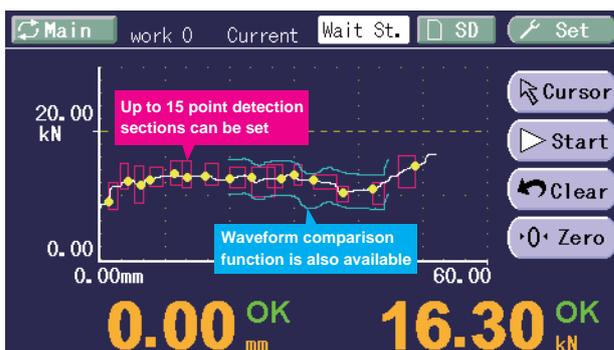

#### Standard

OK/NOK judgement up to 5 points

#### Multi Hold Point Specifications

OK/NOK judgement up to 15 points

## Specifications

Sensor input (Standard)	Sensor input for load (Fixed as strain gauge input) (6-wire)	Excitation voltage DC 2.5, 5, 10 V±10% (depending on settings) Output current: Within 30mA
	Signal input range	-2.0 to +2.0 mV/V
Accuracy	Non-linearity:	Within 0.02% FS±1 digit (at 2.0 mV/V input)
	Zero drift:	Within 0.1 μV/°C RTI
Low-pass filter	Gain drift:	Within 15 ppm/°C
	Selectable from 10 Hz to 10 kHz (-6 dB/oct.) (at A/D converter speed 25000 times/sec.)	Selectable from 2 Hz to 2 kHz (-6 dB/oct.) (at A/D converter speed 5000 times/sec.)
A/D converter	Speed:	Selectable from 25000 times/sec., 5000 times/sec.
	Resolution:	24 bit (binary) Effective resolution: Approx. 1/20000 against 2.0 mV/V
Sensor input for displacement (Pulse input: Line driver)	Max. input frequency	1 MHz
	Internal count range	Approx. 1,000,000
Adaptable encoder	Output:	Incremental type 2-phase output (A/B-phase signal output)
	Also capable of single-phase output (A-phase input used. All pulses are counted as in the plus direction.)	Output stage circuit specification: Line driver (Based on RS-422)
Sensor input Multisensor input (Option: [MLT] or [MLT2])	Sensor input for load (Strain gauge) (6-wire) ...	Same as standard
	Sensor input for displacement (Pulse input: open collector) ...	Other than output circuit, spec is standard [MLT] Output stage circuit specification: Open collector
Voltage input	Sensor input for displacement (Pulse input: line driver) ...	Same as standard [MLT2]
	Signal input range	-10 to +10 V
Input impedance	Accuracy	Approx. 1 M
	Non-linearity:	Within 0.02% FS±1 digit (at 10 V input)
Zero drift:	Gain drift:	Within 0.01%/°C
	Selectable from 10 Hz to 10 kHz (-6 dB/oct.) (at A/D converter speed 25000 times/sec.)	Selectable from 2 Hz to 2 kHz (-6 dB/oct.) (at A/D converter speed 5000 times/sec.)
A/D converter	Speed:	Selectable from 25000 times/sec., 5000 times/sec.
	Resolution:	24 bit (binary) Effective resolution: Approx. 1/20000 against 10 V
Analog voltage output	Output level	Approx. 2 V per 1 mV/V input
	Load resistance:	2 k or more
Display	4.3 inch TFT color LCD module. Display area: 95.0(W) x 53.9(H) mm, Dot configuration: 480 x 272 dot	Display frequency Fixed at 3 times/sec.
	Comp. & judge. function	Multi point comparison mode: 16 ch (set values)
Waveform comparison mode: 16 ch (setting values can be stored)		Compares the actually measured waveform against the preset HI/LO waveforms. The overall measured waveform will be compared against the preset HI/LO and if any of its points exceeds the preset waveform, then the measured waveform will be NOK.
Hysteresis specifications	Multi-point comparison and waveform comparison are possible by measuring going/returning with one waveform. (Can choose go/return difference comparison)	Number of drawing points: 1000 points for going, 1000 points for returning
	Multi hold point specifications	Multi hold: 15 points
Preventive maintenance support	Sampling speed:	5000 Hz
	Trend display	Showing the trend of measurement data to help finding irregularities at early stage.
Statistics	Using the latest 10000 measured data	Displaying number of measurement, OK, NOK
	Screen capture	Saves screen capture data as bmp data.
Work name edit	Work name can be edited and displayed for each Work No..	Setting list display
	Changed setting items comparing to master set values are highlighted.	User management
External signal	Login ID and Password	Output signal (16)
	Point judgment (load, displacement)/ Load overload/ Measurement complete/ Waveform comparison judgment/ Load & displacement OK/ CPU OK/ SD card OK/ Timing output 1,2	Output Type: Sink type/ source type selectable. (Source Type is option: [ISC])
Output transistor ON at signal ON.	To connect an input unit like a PLC, connect plus common for sink type, and minus common for source type.	Rated voltage: 30 V, Rated current: 30 mA

\* Please note that there are possibilities of individual differences in a color tone on display devices such as LEDs, fluorescent display tubes and LCDs due to manufacturing process or production lots.

Input signal (16)	Load digital zero/ Displacement adjustment/ Measurement start/ Measurement end/ HOLD1 to 5/ Reset/ Forcibly light up the backlight/ Touch panel lock/ Work change
Interface	Input type: Plus common/ Minus common selectable. (Minus common is option: [ISC]) To connect a transistor, connect NPN output type (sink type) for plus common and PNP output type (source type) for minus common.
Interface	USB: USB interface ODN: DeviceNet interface (option) CCL: CC-Link interface (option) (Only one option can be installed)
EIP: EtherNet/IP interface (option) ETN: Ethernet interface (option) PRT: PROFINET IO interface (option)	
Option	ISC: I/O Source board, MLT: Multi sensor input, MLT2: Multi sensor input 2
Special option	FS2000-HYS: Special option which records and judge a reverse waveform (Hysteresis Specifications) FS2000-MHP: Special option which enables to detect hold points up to 15 (Multi Hold Point Specifications)
General specifications	Power supply voltage DC 24 V (±15%) Power consumption 6 W typ. Operation condition Temperature: Operation: -10 to +40°C Storage: -20 to +60°C Humidity: 85% RH or less (non-condensing) Dimension 132(W) x 98(H) x 110(D) mm (not including projections) Weight Approx. 1.0 kg
Attachments	I/O connector (with cover) ...1 Analog connector ...1 Operating tool ...1 SD card 1 GByte ...1 Operation manual ...1
Accessories	CN36: I/O connector (with cover) CN71: CC-Link connector CN72: Double row connector for CC-Link CN77: Analog connector CND01: DeviceNet connector TSU03: DC lighting surge unit
CE marking certification	EMC directive EN61326-1

### Structure of product code

FS2000
□
□
□

① Standard unit
② I/O output
③ Sensor input
④ Interface

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th>Sign</th><th>Output type</th></tr> <tr><td>Standard</td><td>Sink type (NPN output)</td></tr> <tr><td>ISC</td><td>Source type (PNP output)</td></tr> </table>	Sign	Output type	Standard	Sink type (NPN output)	ISC	Source type (PNP output)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th>Sign</th><th>Interface</th></tr> <tr><td>Standard</td><td>USB</td></tr> </table>	Sign	Interface	Standard	USB
Sign	Output type										
Standard	Sink type (NPN output)										
ISC	Source type (PNP output)										
Sign	Interface										
Standard	USB										

One optional interface can be added in addition to the standard interface.


<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th>Sign</th><th>Output type</th></tr> <tr><td>Standard</td><td>Strain gauge, Line driver</td></tr> <tr><td>MLT or MLT2 *1</td><td>Strain gauge Open collector (MLT only) Line driver (MLT2 only) Voltage (Load or displacement)</td></tr> </table>	Sign	Output type	Standard	Strain gauge, Line driver	MLT or MLT2 *1	Strain gauge Open collector (MLT only) Line driver (MLT2 only) Voltage (Load or displacement)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th>ODN</th><th>DeviceNet</th></tr> <tr><td>CCL</td><td>CC-Link</td></tr> <tr><td>EIP</td><td>EtherNet/IP</td></tr> <tr><td>ETN</td><td>Ethernet *2</td></tr> <tr><td>PRT</td><td>PROFINET IO</td></tr> </table>	ODN	DeviceNet	CCL	CC-Link	EIP	EtherNet/IP	ETN	Ethernet *2	PRT	PROFINET IO
Sign	Output type																
Standard	Strain gauge, Line driver																
MLT or MLT2 *1	Strain gauge Open collector (MLT only) Line driver (MLT2 only) Voltage (Load or displacement)																
ODN	DeviceNet																
CCL	CC-Link																
EIP	EtherNet/IP																
ETN	Ethernet *2																
PRT	PROFINET IO																

\*1 When choose MLT option, ULE-50 is not available to use.  
\*2 When choose ETN option, USB interface is not included.

#### Combination table

X axis	Y axis	Standard	MLT	MLT2
Time	Strain gauge			
Line driver	Strain gauge		x	
Line driver	Voltage (Load)	x	x	
Time	Voltage (Load)	x		
Open collector	Strain gauge	x		x
Open collector	Voltage (Load)	x		x
Voltage (Displacement)	Strain gauge	x		

## External dimension

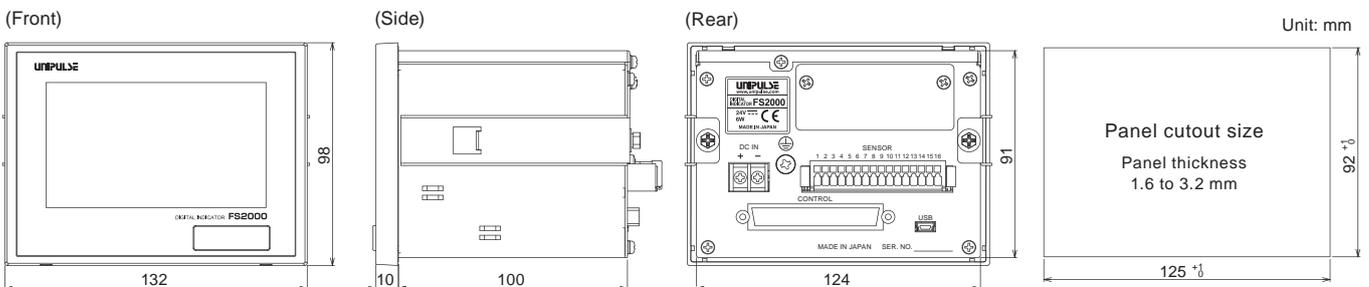

## Digital contact sensor ULE-50

### Digital contact sensor **ULE-50**

A digital contact sensor designed for FS2000 and F381A-LDI. You can perform OK/NOK judgment with a Force vs Displacement curve.



- Wide measuring range & high-accuracy
- Measuring range: 50 mm
- Resolution: 2.5 μm