

FC400-CCL-FA FC400-DAC-FA FC400-EIP-FA FC400-ECT-FA FC400-232-FA FC400-PRT-FA



DIN RAIL MOUNT DIGITAL INDICATOR

CC-Link EtherNet/IP EtherCAT

PROFINET



RoHS2


Applicable from fast response measurement to multi-weighing with high accuracy!

- FC400-CCL-FA** Equipped with CC-Link, S/I/F, USB interface
- FC400-DAC-FA** Equipped with D/A converter, RS-485, USB interface
- FC400-EIP-FA** Equipped with EtherNet/IP and USB interface

- FC400-ECT-FA** Equipped with EtherCAT and USB interface
- FC400-232-FA** Equipped with RS-232C, S/I/F, USB interface
- FC400-PRT-FA** Equipped with PROFINET IO, USB interface

High sampling rate & resolution

High-speed A/D conversion and powerful digital processing capability of 2400 times/sec.
High resolution of 1/100000 (max).



Measurement can be performed quickly and precisely due to the high speed A/D conversion.


Application software for USB interface

With communication through USB interface, logging, graph display, setting parameters, and calibration can be done.



High performance filter & auto filter adjustment

With combination of the low pass filter (0.1 to 600 Hz) which corresponds to various vibration and the moving average filter (OFF, 2 to 999) that is effective for periodic vibration, the automatic searching for optimal value with accuracy and stability can be achieved.
(You can manually adjust settings too)


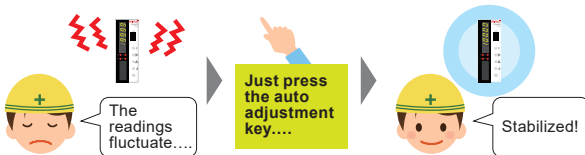


Compact size

The main body can be fit into a limited space!
Lightweight & compact body for 35 mm DIN rail mount.



Various interfaces

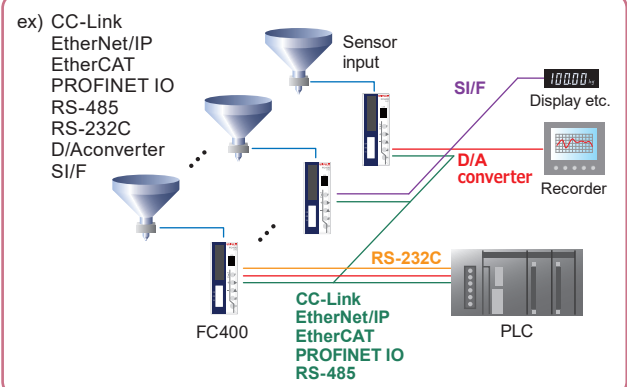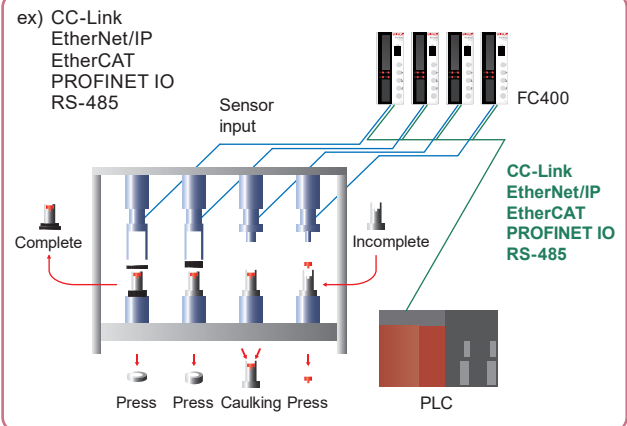

ex) USB



Digital peak & bottom hold, Hi & Lo function

Quickly detects high speed changes & makes OK/NOK judgment

Input conversion value display

The output signal level of load cell can be displayed in mV/V for monitor purpose.
Malfunctioning indicator or faulty sensor can be differentiated easily.

Equivalent input calibration

Theoretical calibration can be performed easily by registering the capacity and rated output of load cells.

6-digit display

24 bit A/D converter enables 6-digit display.

Specifications

Analog	Excitation voltage	DC 5 V±5% Output current: Within 90 mA DC 2.5 V±5% Output current: Within 45 mA (depending on settings) Ratiometric method (Up to six 350 Ω load cells can be connected in parallel)
	Signal input range	-3.9 to +3.9 mV/V
	Zero adjustment range	Automatic adjustment by digital processing -3.0 to +3.0 mV/V
	Span adjustment range	Automatic adjustment by digital processing 0.01 to 3.8 mV/V
	Min. input sensitivity	0.15 μV/count
	Accuracy	Non-linearity: Within 0.01% FS Zero drift: 0.0002% FS/°C typ. * When calibrated by 3 mV/V with 5 V of the excitation voltage Gain drift: 1 ppm/°C typ.
	Filter	Variable low pass filter: 0.1 to 600 Hz Moving average filter: OFF, 2 to 999 times
Display	A/D converter	Speed: 2400 times/sec. Resolution: 24 bit (binary)
	Display unit	Character height: 8 mm Numerical display by 7-segment green LED
	Display value	Up to 6 digits
	Display frequency	Selectable from 1, 3, 6, 13, and 25 times/sec.
	Status display	RUN, SD, RD, ERR (FC400-CCL-FA) MS, NS (FC400-EIP-FA, FC400-PRT-FA) RUN, ERR (FC400-ECT-FA)
Hold	Sample, Peak, Bottom, Peak&Bottom, Average	
External signal	Output signal (5 points)	Selectable/configurable Transistor's open collector output V _{ceo} = 30 V, I _c = 50 mA
	Input signal (3 points)	Selectable/configurable Input is ON when shorted to COM terminal by contact (relay switch, etc.) or non contact (transistor, open collector, etc.). * DC 24 V external power supply is required.
Interface	CC-Link interface (FC400-CCL-FA) D/A converter interface (Voltage and current output) (FC400-DAC-FA) EtherNet/IP interface (FC400-EIP-FA) EtherCAT interface (FC400-ECT-FA) PROFINET IO interface (FC400-PRT-FA) RS-232C interface (Selectable from Modbus-RTU or UNI-Format) (FC400-232-FA) RS-485 interface (Selectable from Modbus-RTU or UNI-Format) (FC400-DAC-FA) SI/F 2-wire type serial interface (FC400-CCL-FA, FC400-232-FA) USB interface	

General specification	Power supply voltage	DC 24 V (±15%)
	Power consumption	3 W typ. (FC400-DAC-FA, FC400-232-FA, FC400-PRT-FA) 4 W typ. (FC400-CCL-FA, FC400-EIP-FA, FC400-ECT-FA)
	Operating conditions	Operation temperature: -10 to +50°C Storage temperature: -20 to +85°C Humidity: 85% RH or less (non-condensing)
	Dimension	34(W) × 88(H) × 91(D) mm (Not including projections)
Attachments	Weight	Approx. 210 g (FC400-CCL-FA, FC400-DAC-FA) Approx. 220 g (FC400-232-FA) Approx. 230 g (FC400-EIP-FA, FC400-ECT-FA, FC400-PRT-FA)
	Quick manual	2 Mini screwdriver..... 1
	Jumper wire	2 CC-Link connector (FC400-CCL-FA)..... 1
Optional accessories	Various I/O connector (FC400-CCL-FA, FC400-EIP-FA, FC400-ECT-FA, FC400-PRT-FA)...	2 (FC400-DAC-FA, FC400-232-FA)..... 3
	CA81-USB: USB cable (TypeA-Bmini) 1.8 m	
	CN74: CC-Link connector (Same as the attachment)	
	CN75: CC-Link connector (Y type branch connector)	
	CN76: CC-Link connector (Terminator connector)	
	CN85: 13 p connector for power source/sensor/RS-485 (or SI/F) (Same as the attachment)	
CN86: 3 p connector D/A converter (Common with RS-232C connector) (Same as the attachment)		
CN87: 10 p connector for external I/O (Same as the attachment)		
CE marking certification	EMC directive EN61326-1	


* FC400-ECT-FA is Free Run mode.
* Please note that there are possibilities of individual differences in a color tone on display devices such as LEDs, fluorescent display tubes and LCDs due to manufacturing process or production lots.

Structure of product code


Model	Interface
FC400-CCL-FA	CC-Link, SI/F, USB
FC400-DAC-FA	D/A converter (Voltage and current output), RS-485, USB
FC400-EIP-FA	EtherNet/IP, USB
FC400-ECT-FA	EtherCAT, USB
FC400-232-FA	RS-232C, SI/F, USB
FC400-PRT-FA	PROFINET IO, USB

External dimension


■ FC400-CCL-FA

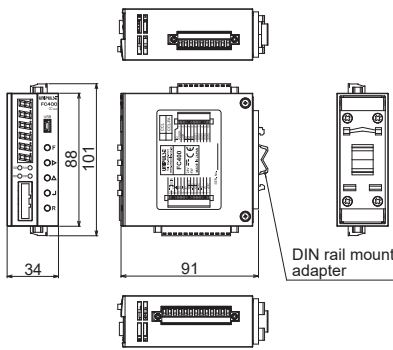


■ FC400-DAC-FA

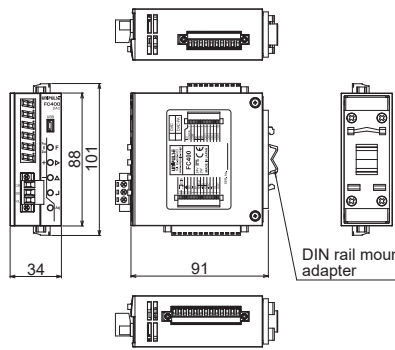


■ FC400-EIP-FA

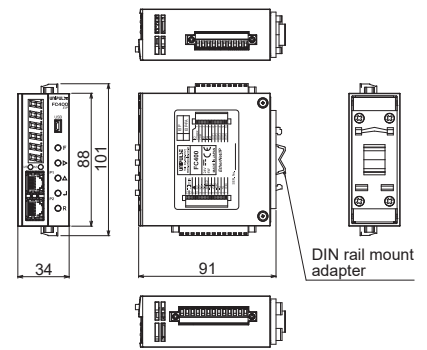


■ FC400-ECT-FA

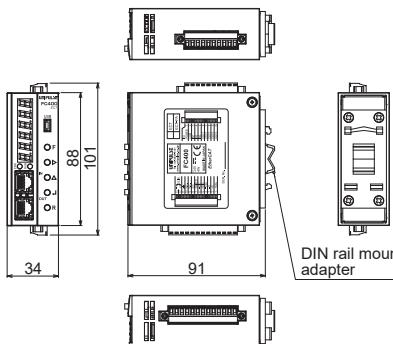

■ FC400-232-FA

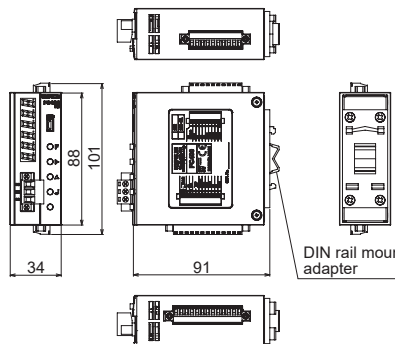

■ FC400-PRT-FA

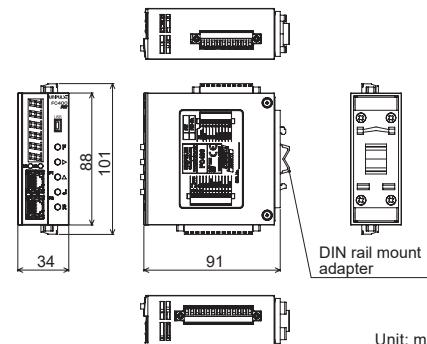

Unit: mm