F490A

PORTABLE DIGITAL INDICATOR




RoHS2


Perfect for inspection of load cell embedded into facilities & quick load check!

- Small, lightweight and power-saving design best for field use
  86(W) × 132(H) × 30(D) mm with weight of approx. 290 g
  It can be continuously used for about 30 hours
  (when using 1 pc of 350 Ω sensor)


- The measured data can be stored in CSV format in its internal memory.
  Recorded data can be referred to and copied using its USB interface.




- Equipped with a variety of information display such as graph, recorded data, measured value (in mV/V equivalent) etc.



Graph



Recording data



Calibration value

Last calibration date/time & zero point of that time can be checked. Load cell malfunction can be found immediately.



Measured value (in mV/V equivalent)

Display sensor output in terms of mV/V. Useful for sensor maintenance checkup.

- Hold function
  Peak/ Bottom/ P-P/ Sample (data monitoring range can be set)


- Multi calibration function
  Stores 6 channels of calibration value; selectable arbitrary calibration value according to sensors at fields

Specifications

Analog	Excitation voltage	DC 3 V±10%, Output current: Within 35 mA
	Signal input range	−3.0 to +3.0 mV/V
	Calibration range	−3.0 to −0.05 mV/V, +0.05 to +3.0 mV/V
	Accuracy	Non-linearity: Within 0.02% FS (at 3.0 mV/V input) Zero drift: Within 0.3 μV/°C RTI Gain drift: Within 5 ppm/°C
	A/D converter	Speed: Selectable from 80, 400, or 1200 times/sec. Resolution: 24 bit (binary) Approx. 1/30000 at 3.0 mV/V input
Display	Display unit	128 × 64 dot black and white LCD
	Measured value	5-digit: −99999 to +99999, Character height: 14 mm
	Status display	Status Display 1: R (Recording)/ A (AC adapter on use)/ U (USB in connection)/ N (NOV RAM reading)/ B (Backup battery abnormal) Status Display 2: HI/ OK/ LO/ PEAK/ BOTTOM/ HOLD
Record	Recording function	- Records when [REC] key is pressed - Records when stability is detected - Records the Hold value when the Hold is cancelled - Interval recording (Records data at every fixed interval) - Records graph data (Records data displayed in graph)
	Recording media	Internal memory
	Recording method	Text form of CSV format
	Recording data	ID, number of recordings, recording date, recording time, measured channels, measured values, unit
	Number of recording data	20000 data
Hold		Peak/ Bottom/ P-P/ Sample Data monitoring range: All ranges/ level/ level+time
Measuring mode		Load measuring/counting
Interface		USB interface
Display mode		Measured value, graph, recorded data, measured value (in mV/V equivalent)
General specifications	Power supply voltage	Internal power supply: AA alkaline batteries or Nickel metal-hydride rechargeable batteries (4 pcs) External power supply: Special AC adapter (5 V, 1.6 A for AC 100 V) (Optional accessories)
	Power consumption	Approx. 60 mA (when a 120 Ω sensor is connected, backlight OFF) Approx. 70 mA (when a 120 Ω sensor is connected, backlight ON)
	Backup power supply	Lithium battery for storing of setting values and recorded data (stores up to 5 years or more)
	Continuous usage duration	Approx. 30 hours (when connected to 350 Ω sensor with backlight OFF) Approx. 12 hours (when connected to 120 Ω sensor with backlight OFF)
	Operating conditions	Operation temperature: −10 to +40°C Humidity: 80% RH or less (non-condensing)
	External dimension	86(W) × 132(H) × 30(D) mm (Not including projections)
	Weight	Approx. 290 g (including the 95 g weight of battery)
Attachments		AA alkaline battery…4 Sensor connector…1 Operation manual…1
Optional accessories	AP0516:	Special AC adapter (for AC 100 V)
	AP0520A:	Special AC adapter (for free power source)
	TM400 AC CABLE EU:	AC cable (for Europe)
	CA81-USB:	USB cable (TypeA-Bmini) 1.8 m
	CBB-01-4W:	4-wire terminal block connector

* Please note that there are possibilities of individual differences in a color tone on display devices such as LEDs, fluorescent display tubes and LCDs due to manufacturing process or production lots.

External dimension

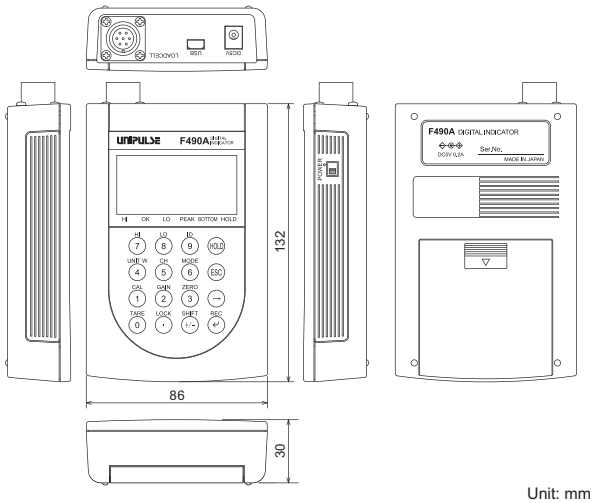

Unit: mm



With a 4-wire terminal block connector (sold separately), a cable with loose ends is easily connectable